

## **INSTRUCTION MANUAL**

### **Shot put return channel**

#### **SRC17-S0547**



File: 2021-09-01

#### **PRODUCT SUPPORT**

Paweł Ciechanowski

[p.ciechanowski@polanik.com](mailto:p.ciechanowski@polanik.com)

**Thank you for choosing Polanik shot put return channel.**

### I. General characteristics

Shot put return channel SRC17-S0547 is designed to easily and quickly retrieve shot puts from the landing sector during competitions and training meetings of shot put. Main features of the channel:

- innovative construction – constituted by elements which are easy to assemble, transport and store,
- easy operating – fast assembly and disassembly processes,
- high durability and quality – all metal elements are galvanized and pillars are additionally powder painted.

### II. Technical specification


Product code	SRC17-S0547
Channel type	modular
Construction	8 steel angle sections mounted on 9 pillars
Max. shot dia. [mm]	135
Max. shot weight [kg]	12
Level difference [m]	from 0,51 to 0,39
Channel length [m]	20
Pillar base dia. [m]	0,44
Net weight	154

### III. Parts list (part sets)

Item	Part/set description	Q-ty pcs
1	Channel standard segment marked "0"	6
2	Channel end section marked "1"	1
3	Channel start section marked "2"	1
4	Pillars marked from "1" to "9" + screws	9
5	Pillar sleeve + screws	9
6	Pillar base + screws	9

### IV. Assembly description

Slide each pillar (item 4) into pillar sleeve (item 5) and secure it with included screw. Next fasten pillars with sleeves to bases (item 6). Set up complete pillars (assembled pillars: item 4 + item 5 + item 6) near a throwing sector line. Note that pillars are marked from 1 to 9. Pillar 1 should be positioned at throwing circle. Next mount channel sections according to the scheme below.

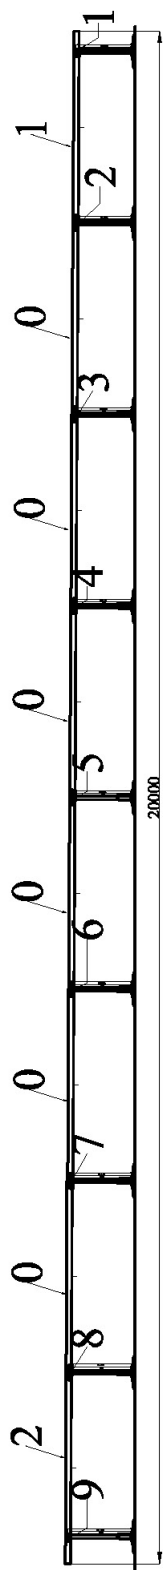

The correctly assembled shot put return channel is presented below.

b





## V. Remarks on maintenance and operating

After competitions and training the channel ought to be swept from dust and sand. Next clean it with commonly available cleaning agents and then dry it. When not used the channel should be disassembled and stored in a dry roofed place. Any defects in paint coating revealed must be repaired with anticorrosive paint.

Even the best technical solutions cannot substitute for common sense. The usage of the product must take place under the supervision of sports facility technical staff. The producer shall not be liable for any incidents caused by the improper assembly or misuse of the product. We reserve the right to alter without prior notice the construction and colours of the product

## VI. Declaration

1) No. 2021-09-01

2) Issuer's name: POLANIK

Issuer's address: Życzliwa 11, 97-300 Piotrkow Tryb.

3) Object of declaration:

No.	Description of goods	Code
1	Shot put return channel	SRC17-S0547

4) The object of declaration described above is in conformity with the requirements of the in-house technical norms.

### Additional Information

5) Declaration for:

Buyer/Distributor/User

Signed for and in behalf of:

POLANIK

2021-09-01 Piotrków Tryb.  
(Date and place of issue)

6) Pawel Ciechanowski  
Product Manager

(Name, function)



(Signature or equivalent authorized by the issuer)